

**EXC-B90ABL LED Flood Light**



Application Environment:  
Indoor  
Outdoor

**Description**

**EXC-B90ABL** series consists of full-color large-power spotlights with high-strength aluminum-alloy housing specially designed by EXC for outdoor landscape lighting. Each light is a separate lighting pixel, and each pixel can realize 8/16bit grades gray scale changing. It could be used for illumination in specific areas or landscape wash lighting, applicable on building facades, bridges, stages, etc.

**Features**

- The newest generation technology: DMX512 parallel bus design
- High strength aluminum and low thermal resistance path cooling design
- High reliability modularization design
- Outdoor lighting protection and electrostatic discharge (ESD) protection design
- Load safety design
- Projection distance: 3m


Basic Specifications	
Color Range	W, RGB
Working Voltage	DC 24V
Max. Power Consumption	6W/8W/9W/10W/12W/15W
Light Source	3/4/5PCS High Power LEDs
LED chip Brand	Optional(Cree, OSRAM, Lumileds, Epistar, etc...)
CRI	80
Control	DMX512, ON/OFF
Source Life	50,000 h
Housing	High Strength Aluminum
Cover	Tempered glass
Weight	1.12Kg

Dimensions	90mm x 90mm x 124mm (L x W x H, exclude Mounting Bracket)
Installation	Mounting seat
Working Temperature	-40°C to 60°C
Storage Temperature	-40°C to 70°C
Protection Rating	IP66
Efficiency flux	≥60LM/W(White), ≥40LM/W(RGBW), ≥30LM/W(RGB)
Beam Angle	6°, 10°, 30°, 80° and other angles optional


Host Controller	EXC-5200
Slave Controller	EXC-2905T1
Signal Cable	EXC-LED outdoor special cable

### Light Intensity Distribution


6°  
Light Intensity Chart

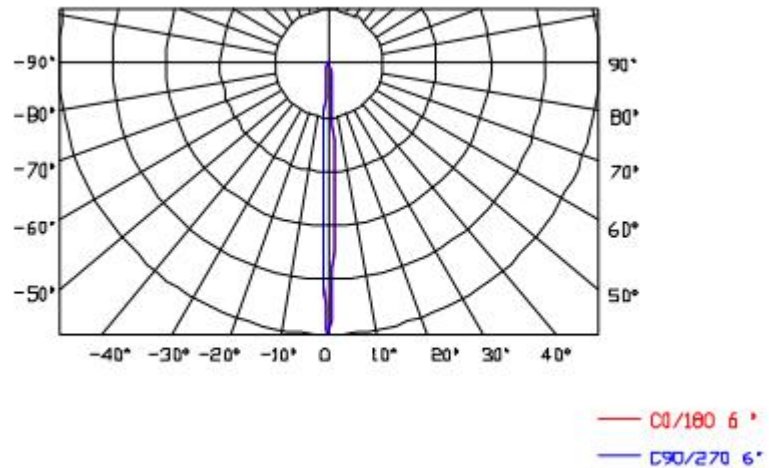

10°  
Light Intensity Chart

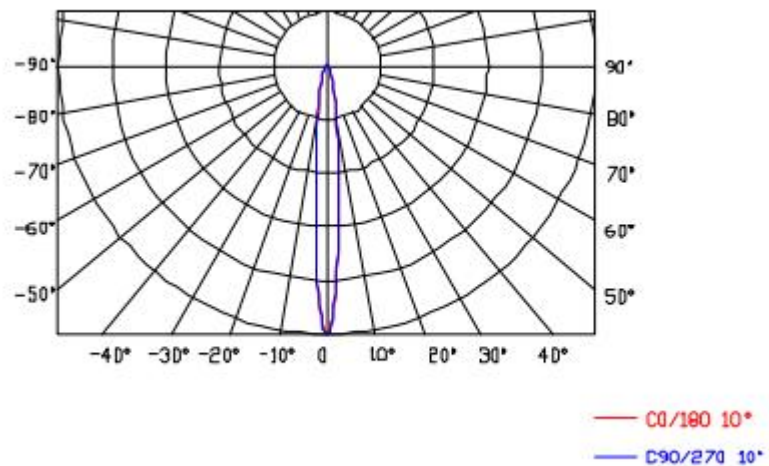


**80°  
Light Intensity Chart**

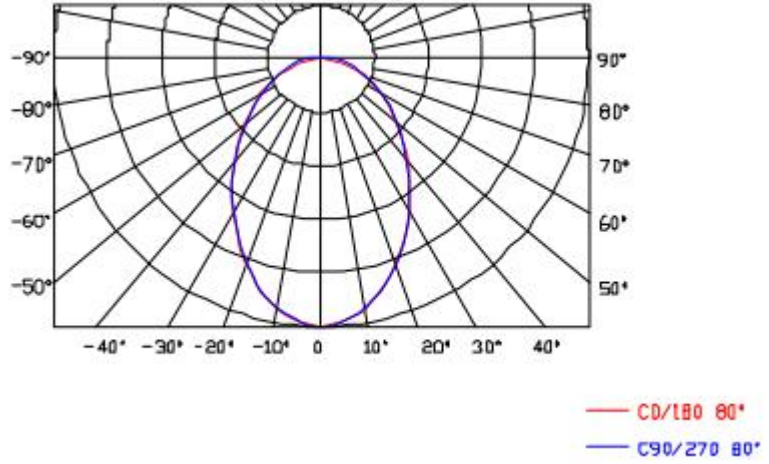


**Physical Dimension**

Unit: mm

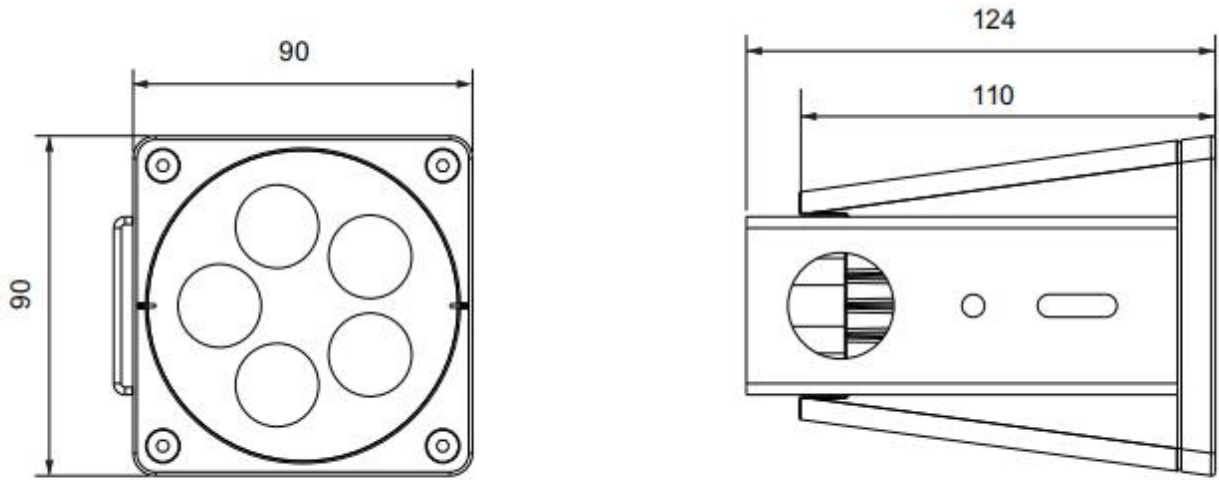

**Installation Diagram**


Place the lamp on the mounting carrier as shown in the figure, and then fix the lamp back onto the mounting carrier with M4 screws.

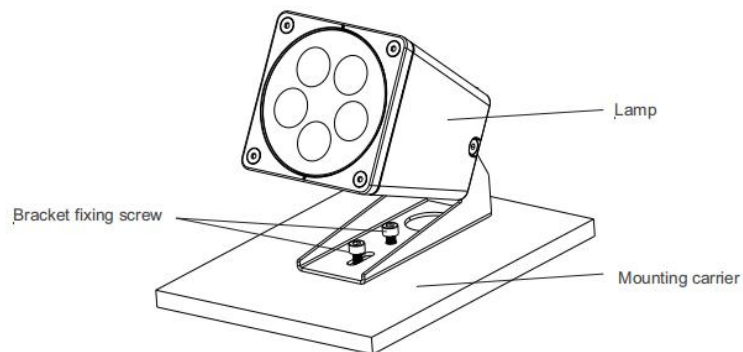


**System connection diagram:**

- 1、 Host controller should connect with slave controller. Working voltage for controllers are AC220V.
- 2、 On-line main controller should connect with slave controller, on-line main controller and sub controller working voltage are AC220V.
- 3、 each sub-controller with 8 ports, with each port 512 pixels, supporting data converter, supports 100 meters ultra-long haul transmission.
- 4、 The CAT-5 e. cable distance should be within 100 meters between host controller and slave controller, between slave controllers and switch, etc.

**Offline Controlling System Diagram**

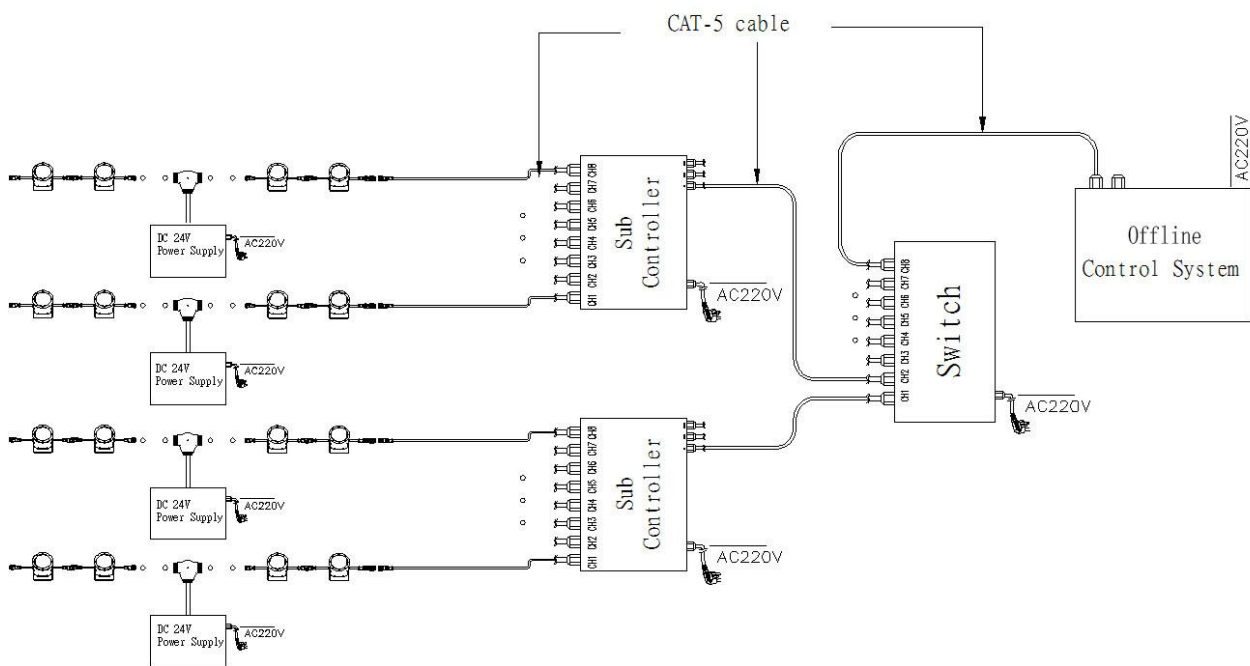

**Online Controlling System Diagram**

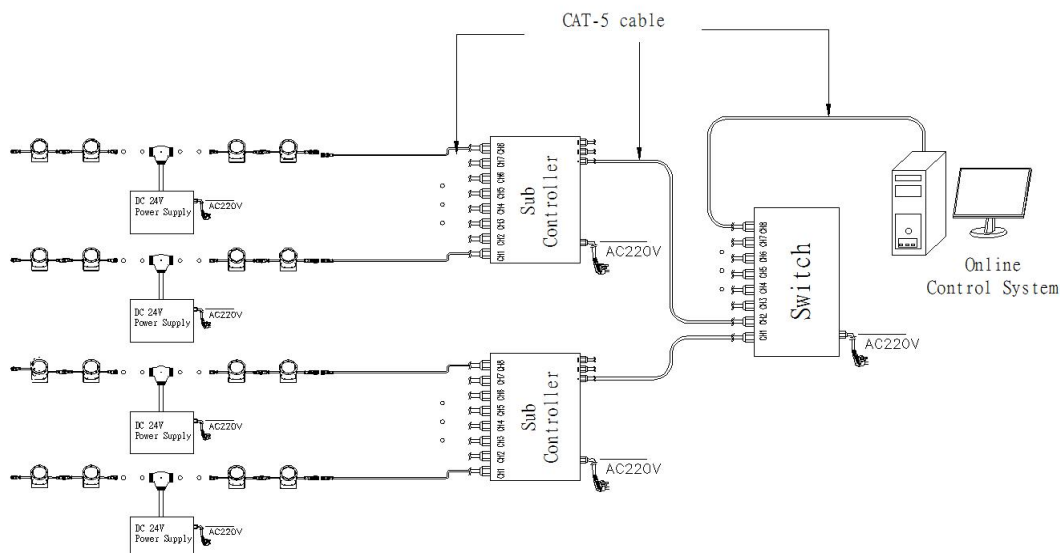





**Accessories :**

**1: Female and Male Connector( Connect to first dot light for signal transmission)**

Female Connector


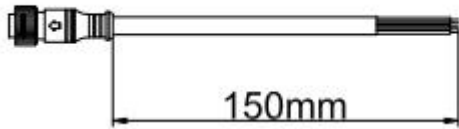


Male Connector

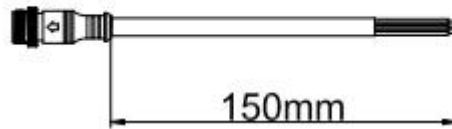

**2: Y Shape Connector(For power Distribution)**

Male Connector

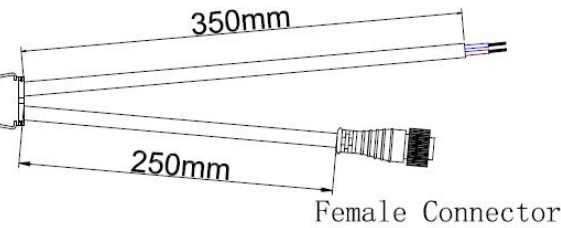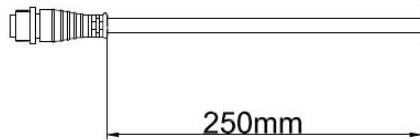

Female Connector

**3: Interconnection Cable(1.3M,3M,5M is standard length)**


Female Connector




Male Connector



**4: End Cap**

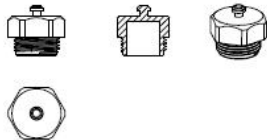

Male Connector



Male Connector